

PRELUDE PLUS SHOWER DOOR INSTALLATION INSTRUCTIONS

EN www.andres.glass



PLEASE HANDLE AND INSTALL THE GLASS WITH CARE, AS THE TEMPERED GLASS CAN BREAK IF ITS CORNERS AND EDGES COME INTO CONTACT WITH A HARD SURFACE!

Before installing or using the product, read the installation, usage, maintenance and warranty instructions.



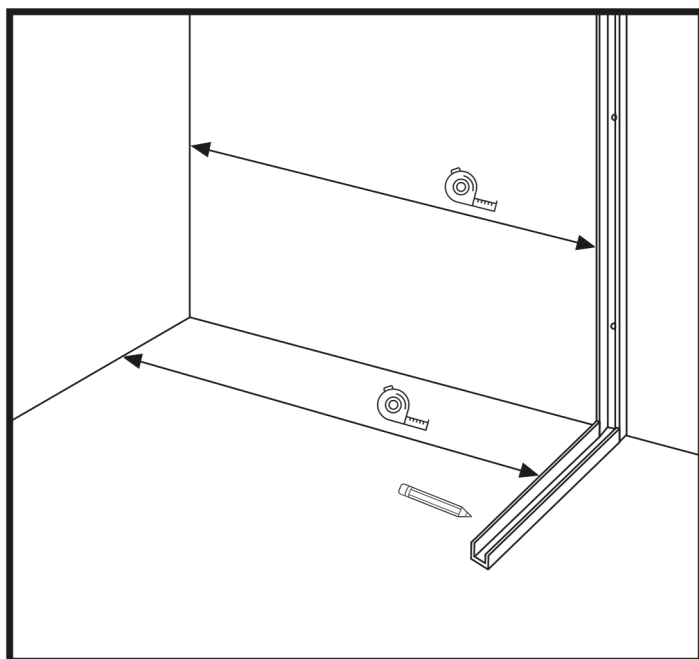


Figure 1

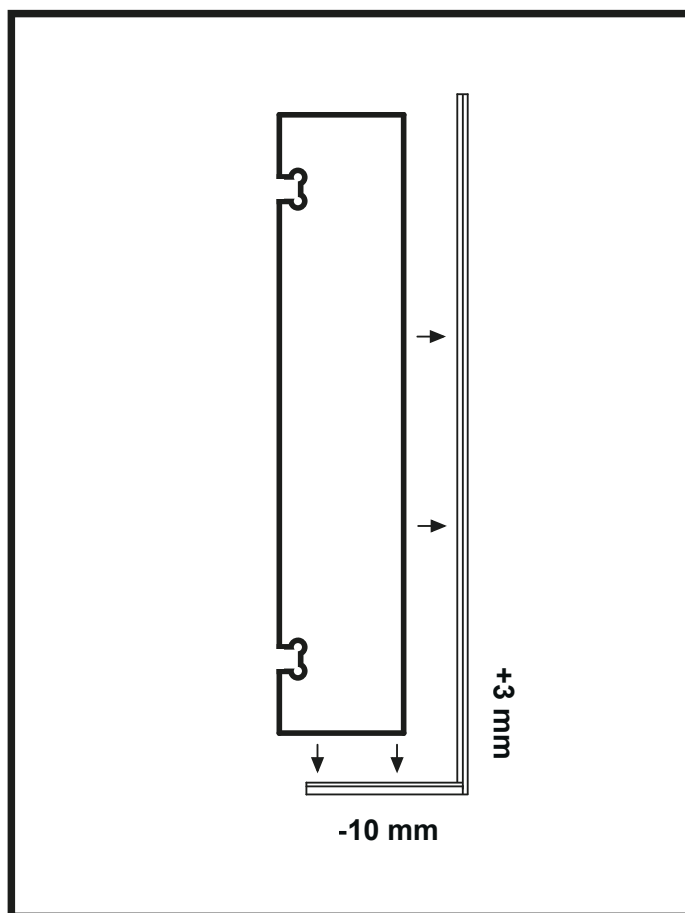


Figure 2

1. First, install the smaller part of the shower door, i.e. the stationary wall with U-profiles and a telescopic tube.
2. Choose the distance of the U-profile from the opposite wall according to your wishes, based on the designed location of your shower door. Measure the required distance from the corner of the wall and make a mark. (Figure 1)

3. Check the length of the U-profile and glass. The bottom U-profile should be about 10 mm shorter than the glass and the longer vertical U-profile should be about 3 mm longer than the glass. (Figure 2)
4. As the floors and walls may have varying slopes, you can adjust the glass accordingly if necessary.

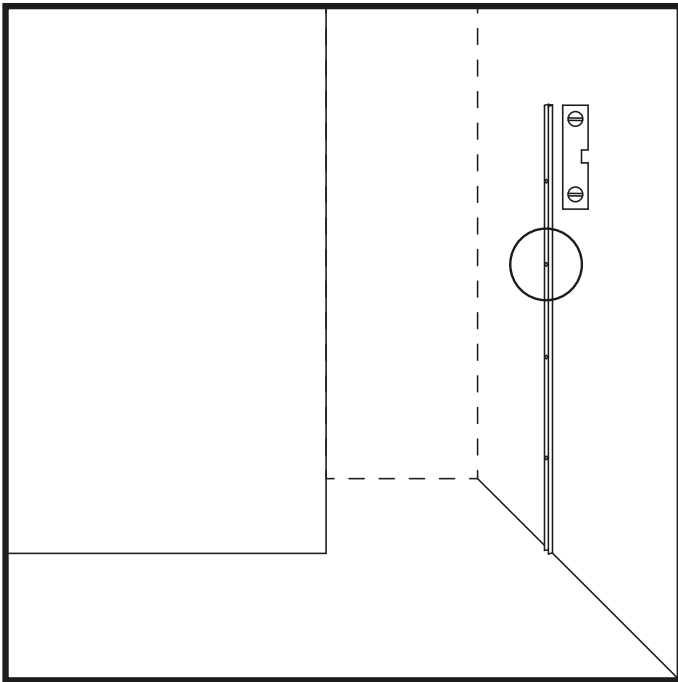


Figure 3

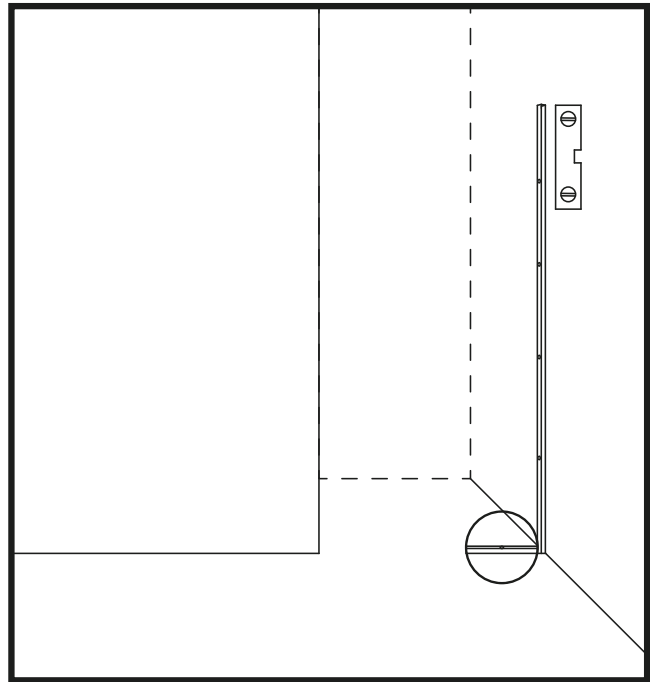


Figure 4

5. Place the longer U-profile vertically on the wall using a level so that the edge of the U-profile is flush with the marked dot and the end of the slat is against the floor. Mark the holes in the profiles (the locations of the dowel holes) on the wall and remove the profile. If marks remain on the edges of the ceramic tiles, try turning the profile the other way and making the marks again. (Figure 3)

6. Drill holes in the marked locations for the dowels included in the kit. Use the designated milling cutter or a drill without hammer mode to avoid damaging the ceramic tiles.

7. Clean the holes and the wall from dust and push the dowels into the drilled holes so that the outer end of the dowel is flush with the wall.

8. Place the vertical profile on the wall and secure with screws.

9. Place the shorter U-profile on the floor, with the end against the U-profile on the wall and parallel to the opposite wall. (Figure 4)

10. Check the distance with a tape measure and mark the position of the profile on the floor.

11. Remove the profile.

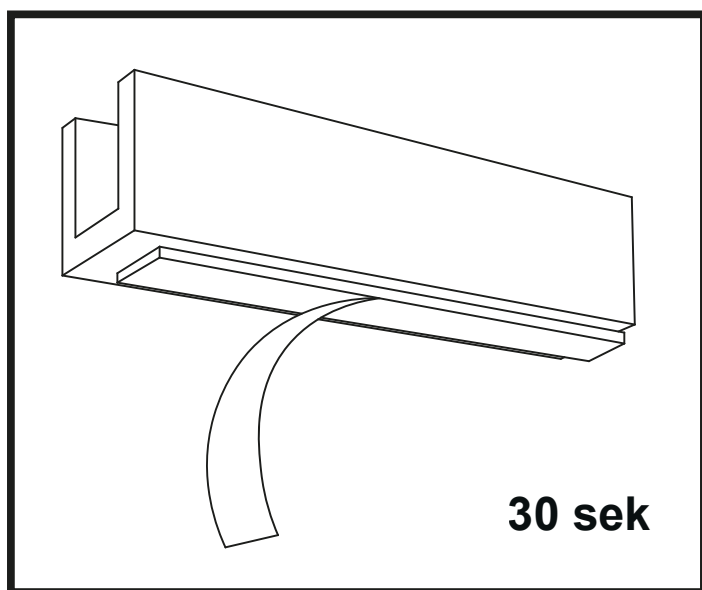


Figure 5

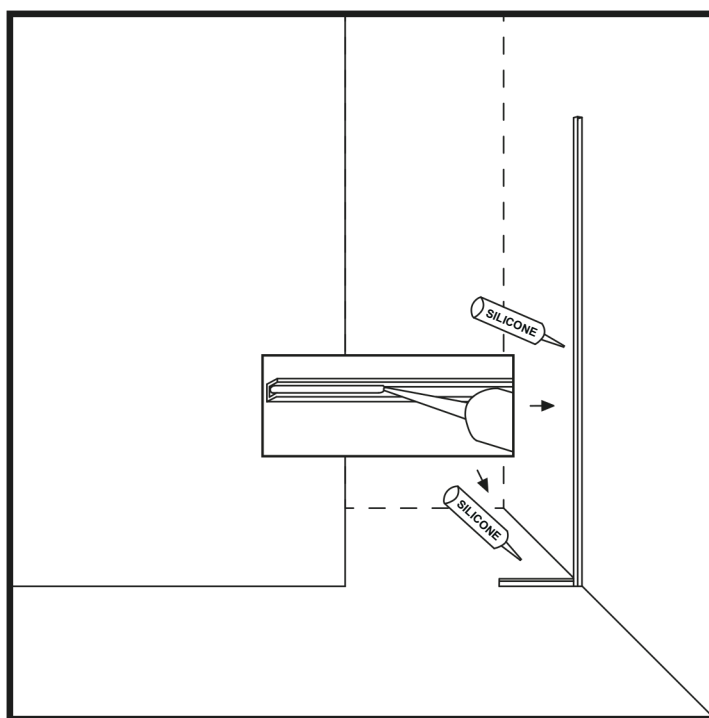


Figure 6

12. Clean the floor surface under the shorter U-profile with a suitable cleaning agent.

13. Remove the backing film from the double-sided tape on the profile and place the profile on the floor in the marked location. Press the lath firmly, holding the pressure for about 30 seconds. (Figure 5)

14. Fill the U-profiles on the wall and floor with an even silicone strip. (Figure 6)

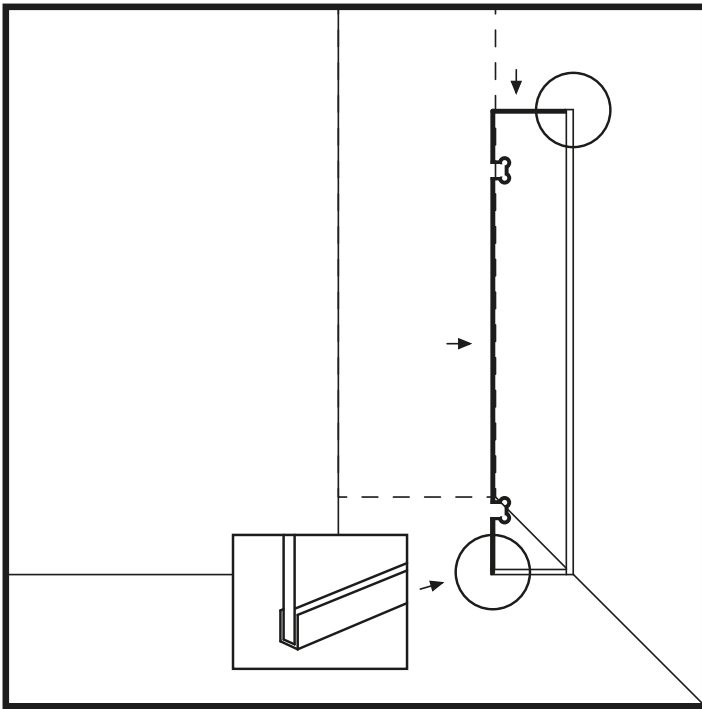


Figure 7

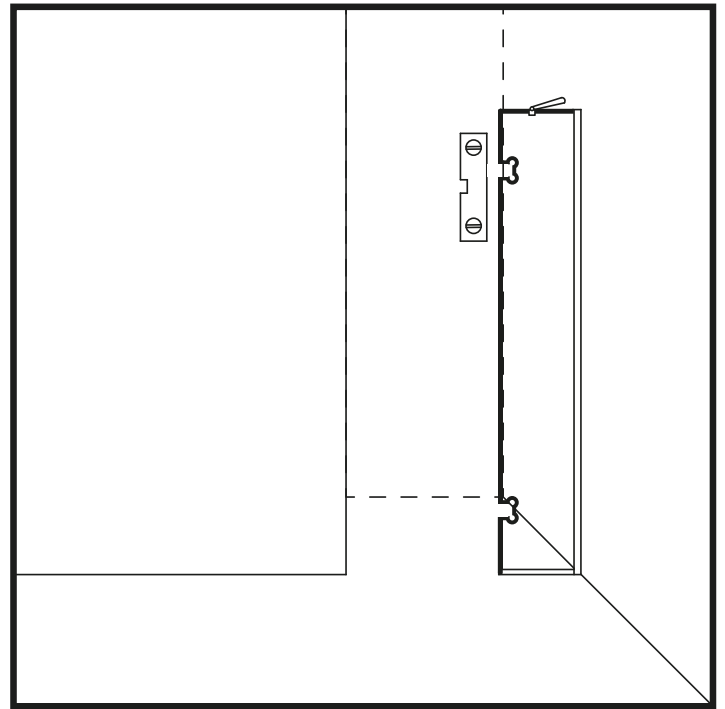


Figure 8

15. Place the shower glass between the U-profiles and press it both towards the wall and downwards so that the silicone adheres to the glass. (Figure 7)

NB! Do not forcefully push the glass against the U-profile, as this may cause the glass to break!

16. Make sure that the outer vertical edge of the glass is aligned with the edge of the bottom U-profile.

NB! If the floor has a slight slope, you may add supporting wedges between the glass and the U-profile as needed.

17. Remove any excess silicone that has been squeezed out between the glass and the U-profile.

18. Install the telescopic tube at a 45 degree angle to the wall. Since the telescopic tube is adjustable, choose the mounting location according to your preference, but we recommend installing it towards the outer corner of the glass. (Figure 8)

19. Check with a spirit level that the glass is vertical, but do not fix the telescopic tube yet.

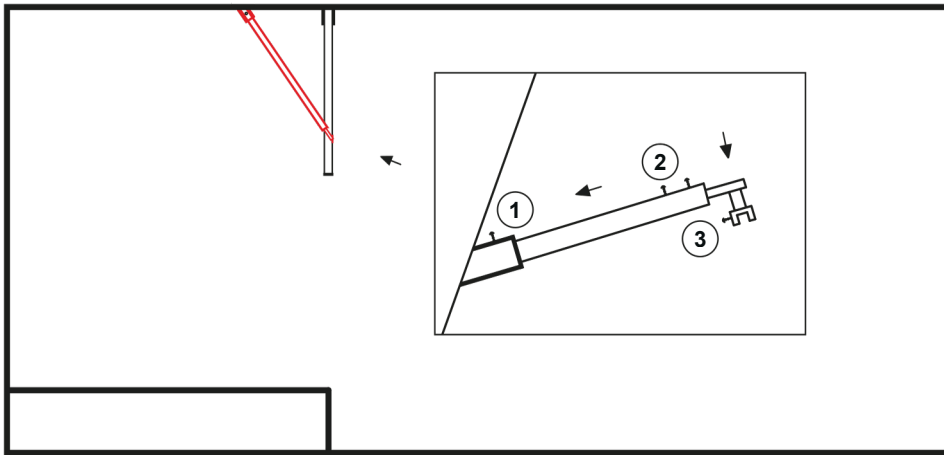


Figure 9: Top view

20. Place the included gaskets into the mounting clamp (3), between the parts that go over the glass and U-profile, to ensure the glass does not touch the metal. (Figure 9)

21. Carefully place the telescopic tube onto the U-profile mounted on the glass, in the pre-measured and planned position. Make sure that the telescopic tube is vertically level.

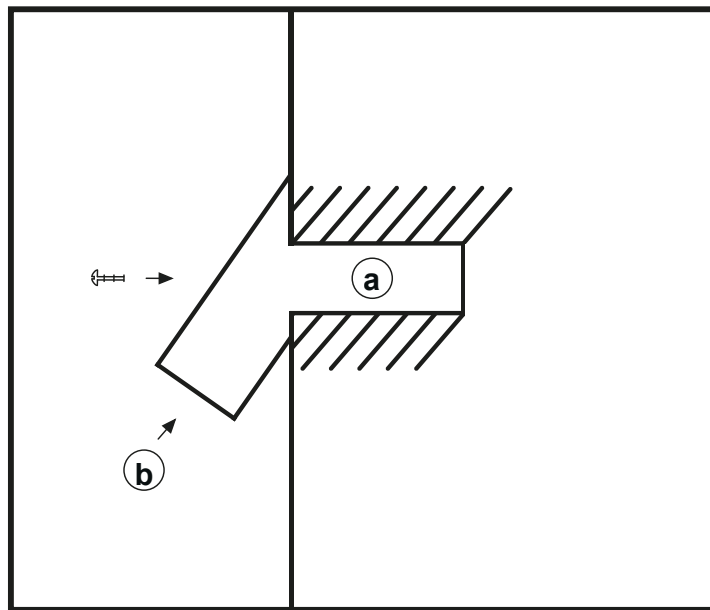


Figure 10: Top view

22. Mark on the wall where the mounting hole (a) needs to be drilled and remove the telescopic tube. (Figure 10)

23. Drill the hole for the dowel (a) at the marked location, remove any dust from the hole, and insert the dowel.

24. Unscrew the screw (1) on the telescopic tube (see Figure 9) and remove the wall-mounted part (b) (see Figure 10).

25. Insert part (b) into the previously drilled hole (a) in the wall and secure it with a screw.

26. Take the telescopic tube and carefully insert it into the wall mount (b) (Figure 10) and rest the other end (3) (Figure 9) on the planned location, on the glass and the U-profile.

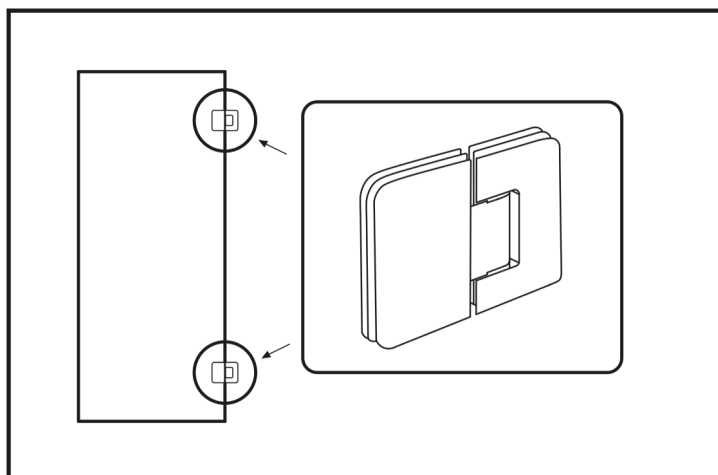


Figure 11

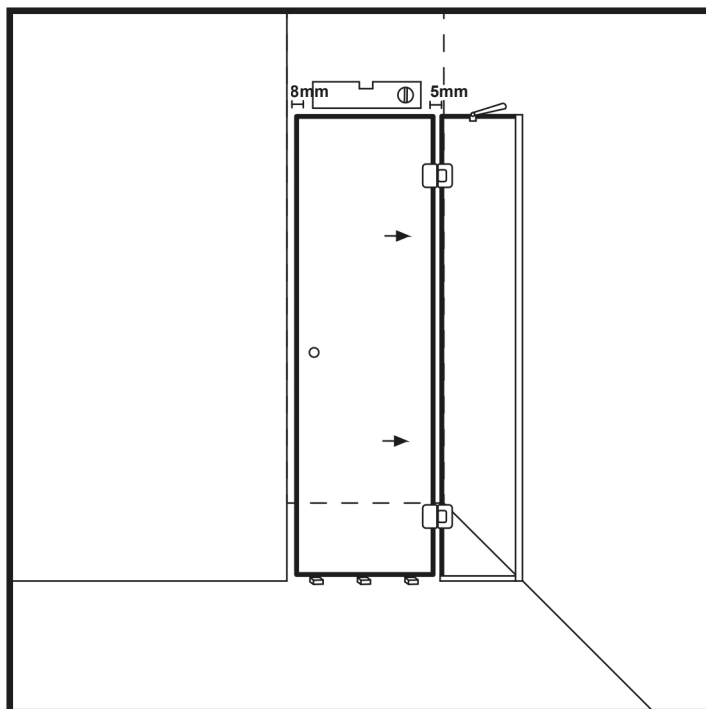


Figure 12

27. Install the hinges to the glass using the screws provided. (Figure 11)

28. Place wooden blocks (max. thickness 10 mm) on the floor where you can support the door glass in the package. (Figure 12)

NB! Make sure that the glass does not come into contact with the floor tiles, as it is tempered glass and may shatter upon impact!

29. Before installing the door glass, make sure that after adding the door glass, there is a gap of approximately 5 mm between the door and the stationary glass wall, where the seal will later fit.

30. Make sure that after installing the door glass, there is a gap of approximately 8 mm between the door and the opposite wall, where the magnetic seal will later fit.

31. Support the glass with its bottom edge on the blocks. Carefully move the door glass to the hinges on the other glass wall and attach the hinges.

32. Use a spirit level to ensure that the glasses are level.

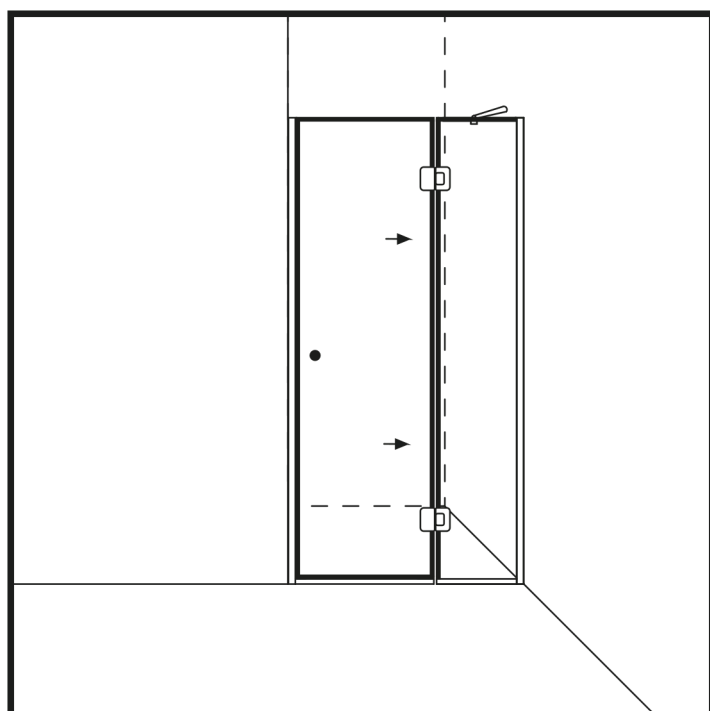


Figure 13

33. Install the brush seal included in the kit on the bottom edge of the glass. Install the longer magnetic seal on the outer vertical side of the door glass. The seal is intended for the side between the door glass and the hinges of the stationary glass, cut pieces of it to the correct lengths and install them. (Figure 13)

34. Tighten and secure the telescope screw (1). (Figure 9)

NB! The mounting point must be oriented upwards!

35. Fix the telescope mount (3) to the glass and U-profile with a screw. NB! It is important that you have previously installed the gaskets included in the set between part (3) Metal parts must not come into contact with the glass, as this may cause the glass to break.

36. Adjust the glass using a level and secure the telescopic tube with screws (2), with their heads facing upwards.

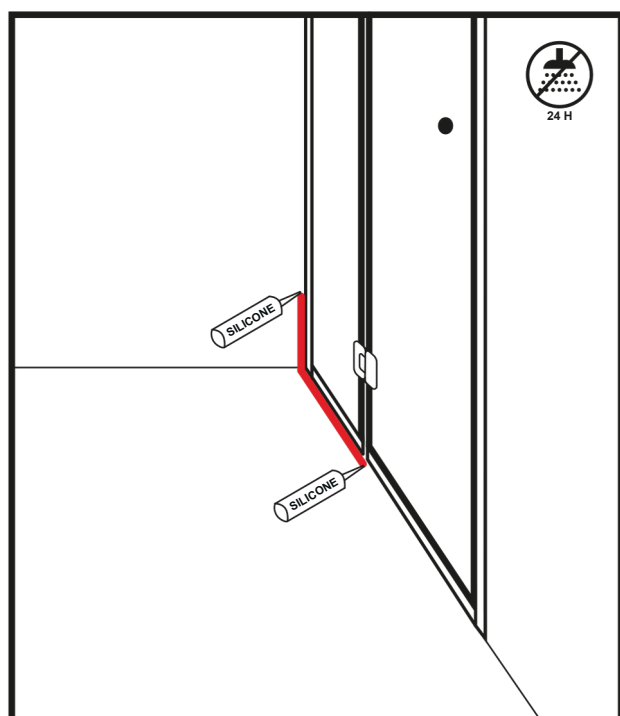


Figure 14

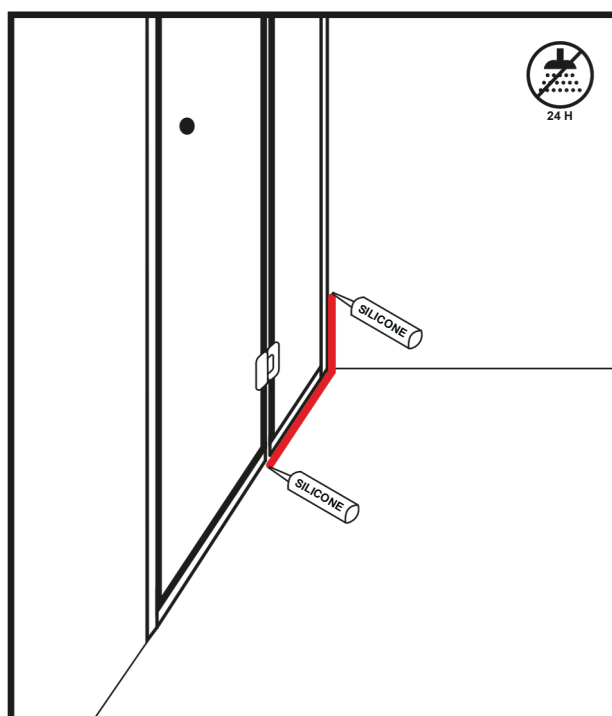


Figure 15

37. Install the handle included in the package.

38. If the installed profiles have protective films on them, remove them.

39. Apply an even bead of silicone to the edges of the U-profiles on both the inside (Figure 14) and outside (Figure 15) of the shower enclosure.

40. Remove excess silicone.

41. Avoid getting water on the silicone for the next 24 hours until it is fully cured.